


TWO-WAY SPEAKER SYSTEM

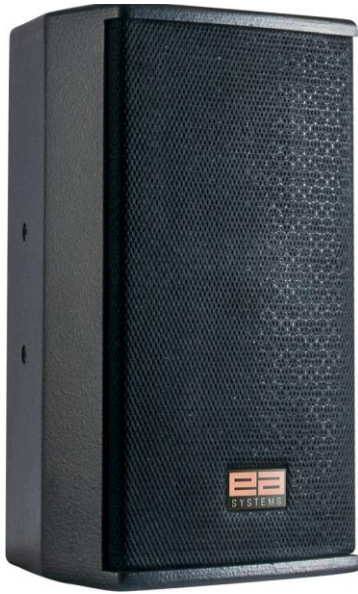

A Multi-purpose 150 RMS two way speaker, with a 8 inch low driver and a 1 inch compression driver coupled with a wide dispersion horn.

The FT81 can be used for small venues up to 200 people as a PA system for speech and music or as a monitor speaker on a small stage.

FEATURES

- Ultra-compact two way system
- Multi-angle plywood enclosure
- Rotatable 90 ° X50 ° horn
- Mid-high frequency's sensitivity can be adjusted
- Flexible mounting options
- Top hat fitting for tripod

APPLICATIONS

- Club sound reinforcement
- Floor monitor
- Fill-in system for main PA

TECHNICAL SPECIFICATIONS

FREQUENCY RESPONSE(-3DB)	60 Hz- 1 8kHz
DRIVERS	1X8"(200mm)/2"voic coil LP
	1 X 1"(25mm)/1 "voice coil HF
RATED POWER	150W RMS, 600W peak
SENSITIVITY	93dB 1 Watt /1 meter
MAXIMUM SPL	115 dB continuous, 121 dB peak
IMPEDANCE	8 ohms nominal
DISPERSION (-6DB)	90 ° X 50 °
CROSSOVER FREQUENCIES	2.8 kHz passive
INPUT CONNECTORS	2 X Speakon NL4
FITTINGS	8 X M8 threaded inserts
	1 X Top hat fitting
DIMENSIONS	(W) 249mm X (D) 245mm X (H)450mm
NET WEIGHT	10.4 kg

CONFIGURATION

