


# TWO-WAY SPEAKER SYSTEM

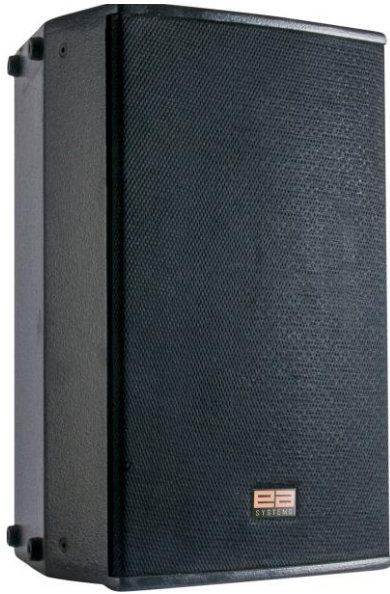

The FT12 is the ideal general-purpose loudspeaker with a wide frequency response, suitable for all kinds of mid-field theatre and live venue applications that require professional sound quality.

## FEATURES

- Compact two-Way passive system
- Multi-angle plywood enclosure
- Mid-high frequency's sensitivity can be adjusted
- Rotatable 90 X 40 horn
- Flexible mounting options
- Top hat fitting for tripod

## APPLICATIONS

- Club sound reinforcement
- Floor monitor
- Fill-in system for main PA

## TECHNICAL SPECIFICATIONS

FREQUENCY RESPONSE	50 Hz - 18kHz(±3dB)
DRIVERS	1 X 12"(300mm) / 3" voice coil LF
	1 X 1 "(25mm) / 1.7" voice coil HF
RATED POWER	300W RMS, 1200W peak
SENSITIVITY	97 dB 1 W / 1 M
MAXIMUM SPL	122dB continuous, 128 dB peak
IMPEDANCE	8 ohms nominal
DISPERSION(~6DB)	90 ° X 40 °
CROSSOVER FREQUENCY	2kHz passive
CONNECTORS	2 X Speakon NL4
FITTINGS	13 X M8 threaded inserts
	1 X Top hat fitting
DIMENSIONS	(W) 374mm X (D) 355mm X (H) 605mm
WEIGHT	21.6kg

## CONFIGURATION

